

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 973 333 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
19.01.2000 Bulletin 2000/03

(21) Application number: 99114104.5

(22) Date of filing: 16.07.1999

(51) Int. Cl.⁷: H04N 7/088, H04N 5/76,
G11B 27/036, G11B 27/32,
G11B 27/11

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 17.07.1998 JP 20399998

(71) Applicant:
KABUSHIKI KAISHA TOSHIBA
Kawasaki-shi, Kanagawa-ken 210-0913 (JP)

(72) Inventors:
• Natsubori, Shigeyasu
Yokohama-shi, Kanagawa-ken 232-0025 (JP)
• Imai, Toru
Futyu-shi, Tokyo 183-0053 (JP)
• Takahashi, Toshiya
Matsudo-shi, Chiba-ken 270-2241 (JP)
• Oyanagi, Shigeru
Yokohama-shi, Kanagawa-ken 235-0016 (JP)


(74) Representative: HOFFMANN - EITLE
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) Apparatus for recording data, method for recording data and television program receiver

(57) By using program information, the amount of which to be transmitted is not fixed, and related information which is related to the expected amount of the main information, an area for recording main information is ensured in advance on a recording medium. This ensures a reliable recording of a program, the recording of which has already been reserved, without affecting

any program which has already been recorded. In addition, even when a change occurs in related information before or after the start of recording information on the recording medium, an area assigned before the start of the recording can be changed corresponding to related information after the change.

FIG.1

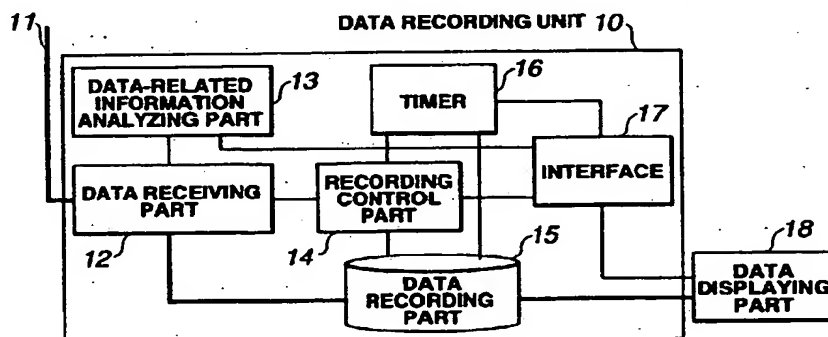

EP 0 973 333 A2

Description

Objects and Summary of the Invention

[0001] It is an object of the present invention to provide an apparatus and method for recording data to enable a data recording apparatus using mainly a recording medium capable of random access to change flexibly an information recording area to be ensured on a recording medium corresponding to a change in related information on the amount of data of main information when it records information, such as program information of a television broadcast wherein the amount of information to be transmitted is not fixed.

[0002] It is another object of the present invention to provide an apparatus and a method for recording data to enable a data recording apparatus using mainly a recording medium capable of random access, when it records information such as program information of a television broadcast wherein the amount of information to be transmitted is not fixed, to ensure a recording area for recording the information once, and then, when the recording medium is exchanged before the start of recording, to ensure swiftly a recording area on a new recording medium.

[0003] It is another object of the present invention to provide an apparatus and method for recording data to enable a data recording apparatus using mainly a recording medium capable of random access to record flexibly and instantaneously without depending on related information.

[0004] It is a further object of the present invention to provide an apparatus and method for recording data which enables to reduce successively excess and deficiency of the recording area to be ensured corresponding to the amount of data to be actually received.

[0005] A data recording apparatus according to the present invention comprises an input means which takes in main information and related information which is related to the main information, an area ensuring means which ensures a vacant area for recording said main information based on said related information on a recording medium, and a recording means which records said inputted main information in the vacant area ensured on said recording medium.

[0006] A data recording apparatus according to the present invention comprises an input means which takes in main information and related information which is related to the main information, an area ensuring means which ensures a vacant area for recording said main information based on said related information on a recording medium, an area re-ensuring means which re-ensures a vacant area for recording said main information when the vacant area ensured on said recording medium by said area ensuring device becomes such that it is impossible to record said main information, and a recording means which records said main information inputted in the vacant area ensured on said recording

medium.

[0007] A method of recording data of the present invention comprises the steps of taking in main information and related information which is related to the main information, ensuring a vacant area for recording said main information on a recording medium based on said related information, re-ensuring a vacant area for recording said main information when the vacant area, which is ensured on said recording medium, becomes unable to record said main information, and recording said inputted main information in the vacant area which is ensured on said recording medium.

[0008] Other features and advantages of the present invention will become more apparent from the following description.

Brief Description of the Drawings

[0009]

Fig. 1 is a diagram showing the whole configuration of a data recording apparatus according to an embodiment;

Fig. 2 shows a program management table and a schematic diagram illustrating recording positions on a recording medium corresponding to this table; Fig. 3 is a flow chart illustrating operation procedures for instantaneous image recording;

Fig. 4 is a flow chart illustrating a process for storing information related to reservation at the time while a recording medium is ejected;

Fig. 5 is a flow chart illustrating a procedure for re-ensuring a recording area at the time when related information is changed;

Fig. 6 is a flow chart illustrating a procedure for changing a recording area in consideration of the amount of data to be actually received;

Fig. 7 is a diagram illustrating operation procedures from program reservation to recording carried out by a data recording apparatus according to an embodiment; and

Fig. 8 is a diagram showing a modified example of a data recording apparatus according to an embodiment.

Detailed Description of the Preferred Embodiments

[0010] The present invention will now be described with reference to the accompanying drawings which illustrate embodiments of the present invention.

[0011] Fig. 1 is a diagram showing the whole configuration of a data recording unit 10 according to an embodiment. Fig. 2 shows a program management table and a schematic diagram of a recording medium corresponding to this table.

[0012] As shown in Fig. 1, the data recording unit 10 receives objective data for recording (main information) such as broadcast programs, packaged software of

musical CD, or images prepared by individuals, transmitted through a data transmission path 11 from outside. The data recording unit 10 also has a data receiving part 12 for receiving data-related information related to objective data for recording, a data-related information analyzing part 13 for analyzing data-related information received at the data receiving part 12, a data recording part 15 for recording transmitted data on a recording medium, such as a disk which is capable of random access, a recording control part 14 for controlling recording operation of the data recording part 15, a timer 16, an interface 17 and a data displaying part 18.

[0013] The data-related information analyzing part 13, when a broadcast program is objective data for recording, analyzes, out of the data-related information of a received broadcast program, such items as the program's information producer and a program list of a television broadcast. When a user reserves a desired program, the data-related information analyzing part 13 issues reserved information based on the analyzed result of data-related information.

[0014] The reserved information is supplied to the recording control part 14 through the interface 17. The interface 17 generates display data for a display based on the reserved information and supplies data to the data displaying part 18. The data displaying part 18 gives a display based on the reserved information. The user can reserve referring to the display based on the reserved information. A signal corresponding to the user's reserving operation is given to the interface 17, and the interface 17 issues a demand for a reservation based on the reserving operation and reserved information corresponding to it. The demand for the reservation of a desired program from the interface 17 is supplied to the recording control part 14.

[0015] The recording control part 14, when it receives a demand for reservation, issues a program identifier for the reserved program. The program identifier is uniquely identifiable in the data recording unit, or in a given physical or logical scope which comprises the data recording unit, or is absolutely identifiable. Some examples of program identifiers are shown in Fig. 2 in a program ID column 21 of a management table 20, "26579", "96156" and "35948".

[0016] Moreover, the recording control part 14, when it receives a demand for reservation, compares the capacity of the area necessary for recording program information, which is designated for recording by the demand for a reservation, with a capacity of continuous or dispersed recording area on a recording medium which exists in the data recording part 15 at that point of time, and decides possibility for the recording of the program information.

[0017] At this stage, the capacity of an area required for recording the program information is determined, for example, as resolution or bit capacity per unit time when the information is images. The recording control part 14 can calculate the area capacity necessary for recording

the program information using a function of resolution of the reserved program, which is designated by a demand for reservation, in the recording mode or average or maximum value of data transfer rate and the time of duration of the reserved program. Such information is contained in the data-related information of the received broadcast program. The recording control part 14 is given such information by the demand for a reservation and calculates the capacity necessary for recording.

[0018] Under certain circumstances, data-related information may also contain the total amount of data of the program information to be transmitted, the amount of data in the physical or logical unit, and the time of duration of the program. In this case, the recording control part 14 can directly use such information transmitted.

[0019] The capacity can also be calculated using a function of the data rate designated by the user at will and the time of duration of the reserved program, or using a function of automatically set conditions and the time of duration of the reserved program.

[0020] The recording control part 14, when it decides that recording of a reserved program on a recording medium is possible, sends back to the interface 17 information to the effect that recording is possible. When it decides that recording is impossible, it sends back to the interface 17 information that recording is impossible. The interface 17, receiving this information, informs the user of the result by, for example, displaying the result on the data displaying part 18.

[0021] The recording control part 14, when it decides that a reserved program can be recorded on a recording medium, ensures an area for recording the reserved program temporarily or actually in a continuous or dispersed recording area on one or a plurality of recording media existing in the data recording part 15. When an area for recording a reserved program is temporarily ensured on a recording medium, the user can actually ensure the recording area, which has been temporarily ensured, by carrying out a predetermined operation for confirming reservation, after receiving information that recording is possible. If the user intends to actually ensure an area for recording a reserved program on a recording medium but has not carried out the operation for confirming reservation after receiving information that recording is possible, actual ensuring of the recording area is canceled.

[0022] Temporary or actual ensuring of a recording area in this stage is virtually carried out by the recording control part 14, which manages the data recording part 15, using variables which show the state of the recording medium existing in the data recording part 15. Or, ensuring of a recording area is also realized by changing attribute of one or a plurality of designators, which indicate the position at which the recording medium exists in the data recording part 15, from "vacant" state to "ensured" state. It can also be realized by writing virtual data expressing an "ensured" state onto one or a

plurality of recording media of the data recording part 15. Or, these methods may be used in an assorted manner.

[0023] The recording control part 14 encloses in a memory, which is not shown, the relation of a program identifier issued at the time of program reservation to a recording area ensured corresponding to it, and the relation of this program identifier to program information corresponding to it as a management table.

[0024] The recording control part 14 can enclose a management table in an optional managing device in the data recording unit 10. A managing device is a physical or logical functional component and exists in said data recording unit solely or as a plurality of dispersed functional elements. The recording control part 14 may also store the management table in a memory of another unit connected with a network which is not shown.

[0025] Further, the recording control part 14 may be designed so that, when a recording medium is exchangeable, a management table is transferred to and stored on a recording medium where recording is finished when the recording medium is removed.

[0026] The management table 20 in a managing device, as shown in Fig. 2, is formed with the following elements, the program ID 21, related information 22 and a recorded position 23. The recording medium 24 is a disk-like recording medium having a data recording track in the form of a concentric circle. A position is indicated using a track number. The recording area corresponding to program ID "26579" (recording track 25) is ensured as an actual area because confirmation of recording has been completed. A recorded position, shown as "01350425", is composed of three elements, a medium number "01", a starting track "350" and an ending track "425". The table of program ID "35948" is in the middle of the course with only issuance of program ID and inspection of the recording area finished. The area ensuring the recording track 26 is in a temporary state and the management table 20 is in an incomplete state. The recording track 27 is one of the vacant areas.

[0027] Information on confirmed reservation is transmitted to the timer 16. The timer 16 gets ready for starting the recording operation at the time to receive the program data based on reserved information. The timer 16 sets the data recording part 15 as an output destination of the data receiving part 12 at a given time before the starting time of the program so that the data recording part 15 starts recording the program information received by the data receiving part 12 at the time to receive program data based on reserved information. And preparations are made, by a given time before the starting time of a program, for recording data in an area ensured on a recording medium of the data recording part 15 so that recording of data outputted from the data receiving part 12 is started at the starting time of a program.

[0028] Now, if the time when a program reservation procedure is completed and the time when recording of a reserved program starts are the same, or, if the time when a program reservation procedure is completed is later than the time when recording of the reserved program starts, or when recording of a program is started directly without a program reservation procedure, such recording will be referred to as "instantaneous recording".

[0029] When this instantaneous recording is carried out, and when the data-related information analyzing part 13 analyzes program-related information such as a producer of program information or a program list of a television broadcast, the recording control part 14, on receiving a demand for reservation based on this program-related information, issues a program identifier for the reserved program and such management information is recorded in a management table. When no program-related information is available, the recording control part 14 generates program-related information, which has a unique meaning physically or logically in said unit, and issues a program identifier for the reserved program. And management information, such as a starting time and a channel, is recorded into management information of the management table.

[0030] When program-related information is obtained, in a similar manner to that described above, the recording control part 14 compares the capacity of the area necessary for recording the program information indicated by a demand for reservation with the capacity of a continuous or dispersed recording area on a recording medium existing in the data recording part 15 at the point of time, and decides whether the program information can possibly be recorded on the recording medium. When the recording control part 14 decides that recording of the reserved program on the recording medium is possible, it returns to the interface 17 information that recording is possible, and also ensures temporarily or actually an area for recording the reserved program in a continuous or dispersed recording area on one or a plurality of recording media existing in the data recording part 15.

[0031] Now, a data recording apparatus according to an embodiment is also capable of carrying out instantaneous recording without depending on program-related information. In this case, when the only recording area ensured on a recording medium has a capacity of less than a previously set threshold, it returns information that recording is impossible. For example, when a capacity of dispersed vacant areas is converted into a recording time in a continuous maximum area to show that it is less than 5 %, it deals this state as a case where no vacant area exists. When the only area ensured is dispersed on a recording medium, for some recording medium or a driving unit having limited performance, it is desirable to move an area where other data have been recorded to another area so as to ensure an area as continuous as possible for each pro-

gram.

[0032] Next, operation of instantaneous recording will be described with reference to the flow chart shown in Fig. 3.

[0033] When an instruction is issued for starting instantaneous recording (60), the recording control part 14 retrieves a vacant area (a continuous vacant area) on a recording medium (6A). When a plurality of vacant areas are retrieved, the recording control part 14 makes a list of these plurality of vacant areas retrieved in order of the area size (6B), and compares the maximum area among them with a value of a previously determined minimum area (threshold) (6C). The recording control part 14, when the maximum area is less than the threshold, decides whether ensuring areas over a plurality of areas is possible or not according to a previously set standard (6D). When ensuring is impossible, the recording control part 14 informs the interface 17 of the decision (6E) and ends the process without recording (6J).

[0034] When ensuring of an area over a plurality of areas is possible, the recording control part 14 issues a program identifier (6F), assigns one or a plurality of areas as a recording area at the time of instantaneous recording (6G), and starts recording (6H). When an instruction for a stop is issued by the user or from another unit, or when recording of a whole program into an ensured recording area is completed, the operation of instantaneous recording ends (6J).

[0035] A data recording apparatus according to an embodiment is, when a recording medium exchanged before the recording of a program onto the recording medium is started, and is further capable of re-assigning a recording area on a new recording medium after the exchange. That is, when a recording medium is physically or logically removed from the data recording part 15 after reservation is confirmed, information, which is related to procedures taken at the time of reservation confirmation such as ensuring of recording area for a reserved program or enclosing of program-related information (reservation-related information), is stored in the following manner; in this data recording unit, other managing device, or on one recording media of the data recording part 15 or on a plurality of them. For example, reservation-related information is stored in a memory, which is not shown, in the recording control part 14. Processes such as re-assignment of a recording area or saving of reservation-related information are designed to be carried out by the recording control part 14.

[0036] Reservation-related information is saved until a reserved program is completed. At this time, if imaginary data showing an ensured recording area exist on a recording medium, the recording control part 14 changes the imaginary data into a vacant area. If a new recording medium is set in the data recording part 15 during this time, re-ensuring an area for this new recording medium is carried out based on saved reservation-

related information. In this case, if the newly set recording medium has the same structure, a vacant area of the same size at the same position as the recording medium which was removed before had, the recording control part 14 ensures the same area as that ensured on the former recording medium. In case a newly set recording medium has structure different from that of the recording medium which has already been ejected, or has the same structure but a different vacant area, the recording control part 14 ensures a recording area in a similar manner to ordinary reservation procedures.

[0037] Now, a description will be given for operation of saving reservation-related information in a data recording unit while a recording medium is removed with reference to the flow chart shown in Fig. 4.

[0038] Detection of the presence/absence of a recording medium is carried out being connected with a driving part of the medium (5A). When a demand for absence of a recording medium is detected (5B), information that program information, recording of which on a recording medium has been scheduled, is unrecorded on the recording medium and the absent recording medium is retained in, for example, a memory, which is not shown, of the recording control part 14, and reservation-related information is also stored (5C). Then, the recording control part 14 cancels one area which has been ensured on the recording medium (5K), and the recording medium is actually ejected (5L).

[0039] When insertion of a medium is detected (5B), the recording control part 14 examines existence of the recording medium which is in an unrecorded and ejected state (5D). If there is no recording medium which is in an unrecorded and ejected state, the process goes back to detection of presence/absence of a recording medium (5A). When there is a recording medium which is in an unrecorded and ejected state, the recording control part 14 examines whether the inserted recording medium is a medium having the same structure as that of the ejected recording medium (5E). If it has the same structure, a vacant area of the same size at the same position, that is, when it is the ejected recording medium itself (5H), the area ensured on the ejected recording medium is ensured as it is on the newly inserted recording medium (5J). When a recording medium is detected to have structure different from that of the ejected recording medium, or to have the same structure but no vacant area of the same size at the same position as the ejected recording medium had, the recording control part 14 ensures a recording area anew based on retained reservation-related information on the inserted new recording medium (5G).

[0040] Now, a description will be given for operation, after a program reservation and before the start of recording, where a change occurs in data-related information or in a user's demand for image recording.

[0041] A likely case is one in which an area ensured through the program reserving procedure becomes insufficient for recording all information due to an

increase in total amount of data of program information caused by the prolongation of a broadcast program based on data-related information from the data-related information analyzing part 13, or by a change in a user's demand for recording. In this case, if the change is made before the start of program recording, the recording control part 14 re-ensures a recording area by enlarging the area assigned beforehand on a recording medium of the data recording part 15 or searching for an area to move to in an area other than the recording area ensured beforehand on the recording medium. When the change is made after the start of program recording, the recording control part 14 adds a recording area to be continued after the data recording area assigned before or an independent area, and, when this added area is continuous from the original data recording area, re-defines these areas as one data recording area. If these areas are not continuous, dispersed recording areas are defined as a recording area for dealing with information on one program.

[0042] Such a new area may also be ensured as continuous as possible by moving existing recording data.

[0043] If the ensuring of a newly assigned area is impossible, the recording control part 14 may, at the time when a change is made in program-related information, either inform a user or others through the interface 17 that complete recording of a program is impossible, or record a reserved program based on program-related information and discontinue recording at time when the recording area ensured beforehand is filled up.

[0044] The next description is given on operation when a recording area is re-ensured corresponding to a change in related information, such as the ending time of a program, with reference to the flow chart shown in Fig. 5.

[0045] The data-related information analyzing part 13 confirms received data-related information at every given period of time (4A). The data-related information analyzing part 13 decides whether the received data-related information is that of a program which has been reserved (4B). When the data-related information is of the reserved program but there is a change in its content (4C), the changed content is confirmed (4D). At this time, the data-related information analyzing part 13 decides whether the information is related to the program, recording of which has started (4E), and, if it is, confirms its ending time (4F). The ending time is confirmed (4G). If the ending time is advanced, the data-related information analyzing part 13 informs the recording control part 14 of the result to cause it to reduce the recording area assigned at present corresponding to the reduced time (4H) and to define the assigned recording area after the change as a program recording area (4I).

[0046] When prolongation of recording time is required, the recording control part 14 decides whether it is possible to assign a recording area for a prolonged

time in a recording area continuing to the recording area assigned at present (4J), and, if it is possible, re-ensures an area with a recording area for the prolonged time added (4I). When it is impossible, the recording control part 14 takes steps to assign one or a plurality of recording areas independent of the present recording area (4M). Then, the recording control part 14 decides whether the assignment of the new area has succeeded (4P), and, if it has, re-ensures a series of originally assigned areas and newly assigned areas as recording areas for a reserved program (4I). When the assignment of a new area is unsuccessful, the recording control part 14 informs the user through the interface 17 that re-ensuring of an area is impossible.

[0047] When a change in the ending time of a program is found before the start of recording, the recording control part 14 decides whether the change can be absorbed within the area assigned at present (4N), and, if it is possible, updates program-related information related to the area assigned at present (4I). If the area assigned at present cannot cope with the change in the program ending time, the recording control part 14 cancels the originally assigned area once (4O) and takes steps to assign a new recording area (4M). Then, the recording control part 14 decides whether assignment of the new recording area is successful (4P), and, if so, re-ensures a series of originally assigned areas and newly assigned areas as recording areas for a reserved program (4I). When assignment of a new area fails, the recording control part 14 informs the user through the interface 17 that re-ensuring of the area is impossible.

[0048] Now, a description will be given with reference to the flow chart shown in Fig. 6 on operation when a recording area is periodically enlarged or reduced during recording of a program corresponding to the amount of received program information per unit time.

[0049] The recording control part 14, once recording is started, measures the amount of data R_i of recorded data per a short time at every given time (7A) and calculates the average amount of data R_m measured since immediately after the start of recording (7B), then, calculates corrected assigned area S_c using a function of the average amount of data R_m and a time which is scheduled for recording (7C). The recording control part 14 decides whether there is a difference between the area assigned at present S_p and the corrected assigned area S_c (7D), and, if the values are the same, goes back again to detection of data rate (7A). When there is a difference and the corrected assigned area S_c is smaller than the area assigned at present S_p , that is, the area needs reduction, a corrected area is assigned based on a predetermined formula using a value of the corrected assigned area S_c (7F).

[0050] If there is a difference and the corrected assigned area S_c is larger than the area assigned at present S_p , the recording control part 14 detects whether enlarging an area which is equivalent to the value of the corrected assigned area S_c is possible

(7G), and, if it is, assigns, using the value of the corrected assigned area Sc, a corrected area according to a predetermined formula (7F). If it is impossible, the recording control part 14 issues a warning about the impossibility of area correction (7H) and goes back to detection of data rate (7A) again. At this time, the reason why just a warning is issued without more steps is that there is a possibility of an area's being reduced at the time of next area correction. When the warning is received, it depends on the user or other control means of the unit to decide whether area correction is to be carried out or not.

[0051] The timer 16, at the ending time of a program, directs the data recording part 15 to stop recording and the data receiving part 12 to stop outputting data to the data recording part 15. When a halt is directed, between the starting time of data recording and its ending time based on this program information, by a user or other operating means of the unit through the interface 17, the data recording part 15 stops temporarily recording this data. In this state where recording is temporarily stopped, the state of temporary stop is discontinued and recording is resumed when, for example, a direction for a halt is issued again by the user through the interface 17, when a direction for recording is issued by the user through the interface 17, or when another direction for a halt or a direction for recording is issued because a previously defined limit time of temporary stop is over.

[0052] Recording of a program is completed by the recording control part 14's directing the data recording part 15 to stop at the ending time of a program based on program information. At this time when recording of a program is completed, a direction is issued so that program-related information, which is represented by information used for program reservation, is recorded in an area succeeding a data recording area or in an independent area on a recording medium. Program-related information may be recorded at an optional time, which does not depend on a program recording time, in so far as it is done after a program reservation procedure was completed.

[0053] The next description will be given on procedures of operation, from program reservation to recording, by this data recording unit with reference to Fig. 7.

[0054] First, a control instruction is issued by a user or other unit through the interface 17. Now, suppose that information for setting, information such as a physical or logical unit of data reserving of which is desired, that is, a broadcast program and/or others, is obtained beforehand from different media such as EPG.

[0055] A description will now be given on a procedure for communication control signals by the interface 17, the recording control part 14, the data recording part 15, the timer 16 and the data receiving part 12, and also on operation for recording reservation data.

[0056] Through the interface 17, a user or other unit requires the recording control part 14 to examine quality of data to support, and vacant capacity on a recording

medium (3A). Examined results on the quality of data to support, vacant capacity on a recording medium are returned to the interface 17 by the recording control part 14 (3B). An identifier for new reservation data, that is, a new program ID is demanded of the recording control part 14 through the interface 17 (3C).

[0057] The recording control part 14 returns an identifier for new reservation data, that is, a new program ID which is unique in at least this data recording unit (3D).

A reservation for a data recording area on a recording medium of the data recording part 15 is demanded, designating an identifier for reservation data and a recording size of reservation data (3E). The recording control part 14 answers whether it has successfully reserved the data recording area on the recording medium (3F). A data recording reservation is made to the timer 16 through the interface 17 (3G). Whether the data recording reservation is made properly or not is returned to the interface 17 (3H). According to the data recording reservation, the timer 16 makes a recording demand of the recording control part 14 and the data receiving part 12 at the staffing time of the recording (3I).

[0058] The data receiving part 12 transmits data corresponding to the reserved contents to the data transmission path 11, and the recording control part 14 starts recording data in the data transmission path 11 in a recording area of the data recording part 15 (3J). An answer is given on whether the receiving of data was done properly at the recording control part 14 (3K). An answer is given on whether the sending of data was done properly at the data receiving part 12 (3L). According to a reservation for data recording, the timer 16 makes a demand for stopping data recording the recording control part 14 and of the data receiving part 12 at the stopping time of data recording (3M). An answer is given on whether the receiving of data was stopped properly at the recording control part 14 (3N). An answer is given on whether sending of data was stopped properly at the data receiving part 12 (3O). Recording of related information of the reservation data is done to the recording control part 14 (3P). An answer is given on whether recording of information related to the reservation data was done properly (3Q).

[0059] Fig. 8 shows a modified example of a data recording apparatus according to an embodiment. In this example, each functional module is configured as an independent unit respectively, and each unit is connected mutually by a network. All of content data such as program data or program-related information and control data, which are mutually given and taken among each of functional modules, are communicated either through the network, which connects each module, or through different networks respectively.

[0060] In this manner, this embodiment enables flexible changes in an information recording area to be ensured on a recording medium corresponding to changes in related-information related to the amount of

main information. In addition, it enables flexible changes in an information recording area to be ensured on a recording medium corresponding to changes in related information related to the amount of main information even after recording was started. Moreover, it enables flexible changes even in a recording area, which is ensured based on related information, corresponding to changes in this related information caused later. It also enables flexible changes, even after recording of information has been started, in a recording area, which is ensured based on related information, corresponding to changes in related information caused afterwards. Further, when a recording medium is inserted or ejected after a recording area is ensured and before recording is started, a recording area can be automatically ensured again on the newly inserted recording medium. Still more, the recording area can be effectively adjusted by dynamic adjustment of recording area considering the amount of data to be received actually. Still furthermore, it enables flexible instantaneous recording which does not depend on related information.

[0061] It is obvious that the present invention is able to become the basis of configuration for different aspects of embodiments in a wide scope without any departure from the spirit and scope of the invention. The present invention should not be limited, except by the appended claims, only to these embodiments.

Claims

1. A data recording apparatus, characterized by comprising:

an input device which takes in main information and related information which is related to the main information,
an area ensuring device which ensures a vacant area for recording said main information based on said related information on a recording medium, and
a recording device which records said inputted main information in the vacant area ensured on said recording medium.

2. A data recording apparatus, characterized by comprising:

an input device which takes in main information and related information which is related to the main information,
an area ensuring device which ensures a vacant area for recording said main information based on said related information on a recording medium,
an area re-ensuring device which re-ensures a vacant area for recording said main information when the vacant area ensured on said recording medium by said area ensuring device

becomes such that it is impossible to record said main information, and
a recording device which records said main information inputted in the vacant area ensured on said recording medium.

3. A data recording apparatus according to claim 2 characterized in that

said area re-ensuring device, when a change occurs in said related information or in user setting, re-ensures said vacant area corresponding to said related information after the change or to said user's setting after the change.

4. A data recording apparatus according to claim 3 characterized in that

said area re-ensuring device, when said related information is changed while said recording device is recording said main information onto said recording medium, re-ensures a vacant area to be ensured for recording said main information, which is unrecorded, based on said related information after the change.

5. A data recording apparatus according to claim 2 characterized in that

said recording medium is a removable recording medium, and
said area re-ensuring device, when said removable recording medium is removed before recording of said main information onto said removable recording medium is started, re-ensures an area for recording said main information on a removable recording medium newly mounted.

6. A data recording apparatus according to claim 2 characterized in that

said area re-ensuring device comprises a measuring device for measuring the amount of data per unit time of said main information inputted, and
said area re-ensuring device re-ensures in a predetermined period an area, which is ensured by said area ensuring device on said recording medium, corresponding to measured results obtained by said measuring device.

7. A data recording apparatus according to claim 1 characterized in that

said area ensuring device comprises a maximum area ensuring device which ensures a

vacant area for recording said main information in the maximum vacant area on said recording medium without being based on related information, and

said area ensuring device selects either ensuring a vacant area based on related information or ensuring a vacant area by said maximum area ensuring device.

8. A data recording apparatus according to claim 7 characterized in that

said area ensuring device, when said recording device carries out instantaneous recording, ensures a vacant area by said maximum area ensuring device.

9. A data recording apparatus according to claim 1 characterized in that

said related information includes information on at least one of the following; the total amount of data of main information, the amount of data in a physical or logical unit, or the total time.

10. A method of recording data, characterized by comprising the steps of;

taking in main information and related information which is related to the main information, ensuring a vacant area which records said main information on a recording medium based on said related information, re-ensuring a vacant area which records said main information when the vacant area, which is ensured on said recording medium, becomes unable to record said main information, and recording said inputted main information in the vacant area which is ensured on said recording medium.

11. A method of recording data according to claim 10 characterized in that

said step of re-ensuring said vacant area, when said related information is changed while said main information is recorded onto said recording medium, re-ensures a vacant area to be ensured for recording un-recorded part of said main information based on said related information after the change.

12. A method of recording data according to claim 11 characterized in that

said step of re-ensuring said vacant area, when

enlarging an area to be ensured due to prolongation of recording time, re-ensures a continuous area on said recording medium.

13. A method of recording data according to claim 11 characterized in that

said step of re-ensuring said vacant area, when ensuring a continuous area on said recording medium is impossible due to prolongation of recording time, re-ensures a new recording area on said recording medium.

14. A method of recording data according to claim 10 characterized in that

said step of re-ensuring said vacant area, when an ensured area is not reusable, re-ensures a new vacant area after cancellation of the ensured area.

15. A method of recording data according to claim 10 characterized in that

said step of re-ensuring said vacant area comprises a step of retaining information in an area ensured after re-ensuring.

16. A television program receiver, characterized by comprising:

a digital receiver receiving broadcasted digital television program and an electric program guide relating to said digital television program from television broadcasting stations, said electric program guide including an information on modifying the digital television program to be broadcasted; a recording device which records said digital television program on a random-access recording medium received by said digital receiver; and a control device which controls said recording device so as to modify the recording of said received digital television program corresponding to the information of the electric program guide received by said digital receiver.

FIG.1

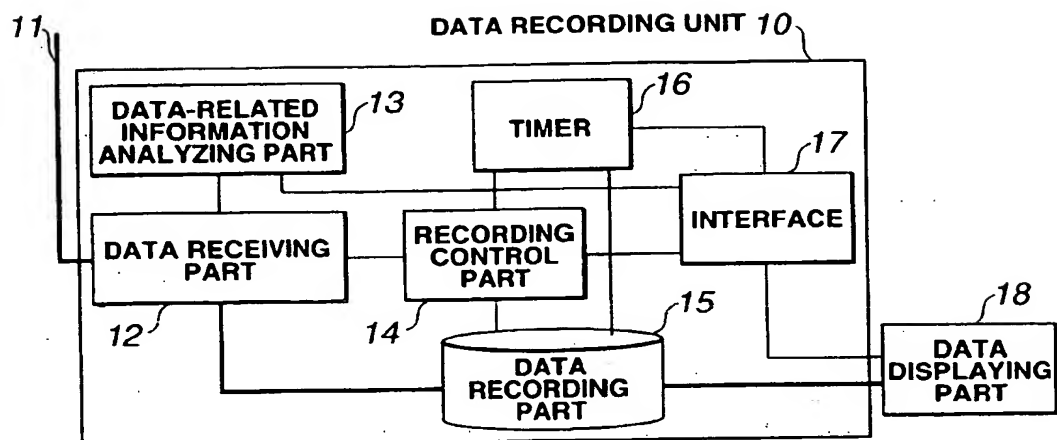


FIG.2

21 PROGRAM ID	22 RELATED INFORMATION	23 RECORDING POSITION
26579	1998/06/10,19:00~19:30,11ch,ECONOMIC NEWS	01350425
96156	1998/06/10,20:55~20:57,21ch,WEATHER IN YOKOHAMA	01290305
35948		01120250

MANAGEMENT TABLE 20

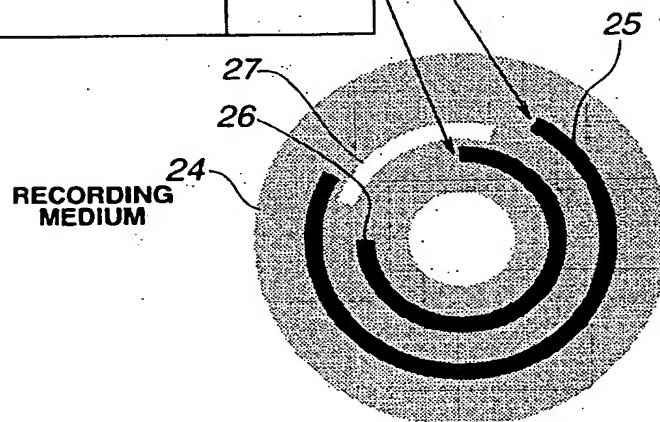


FIG.3

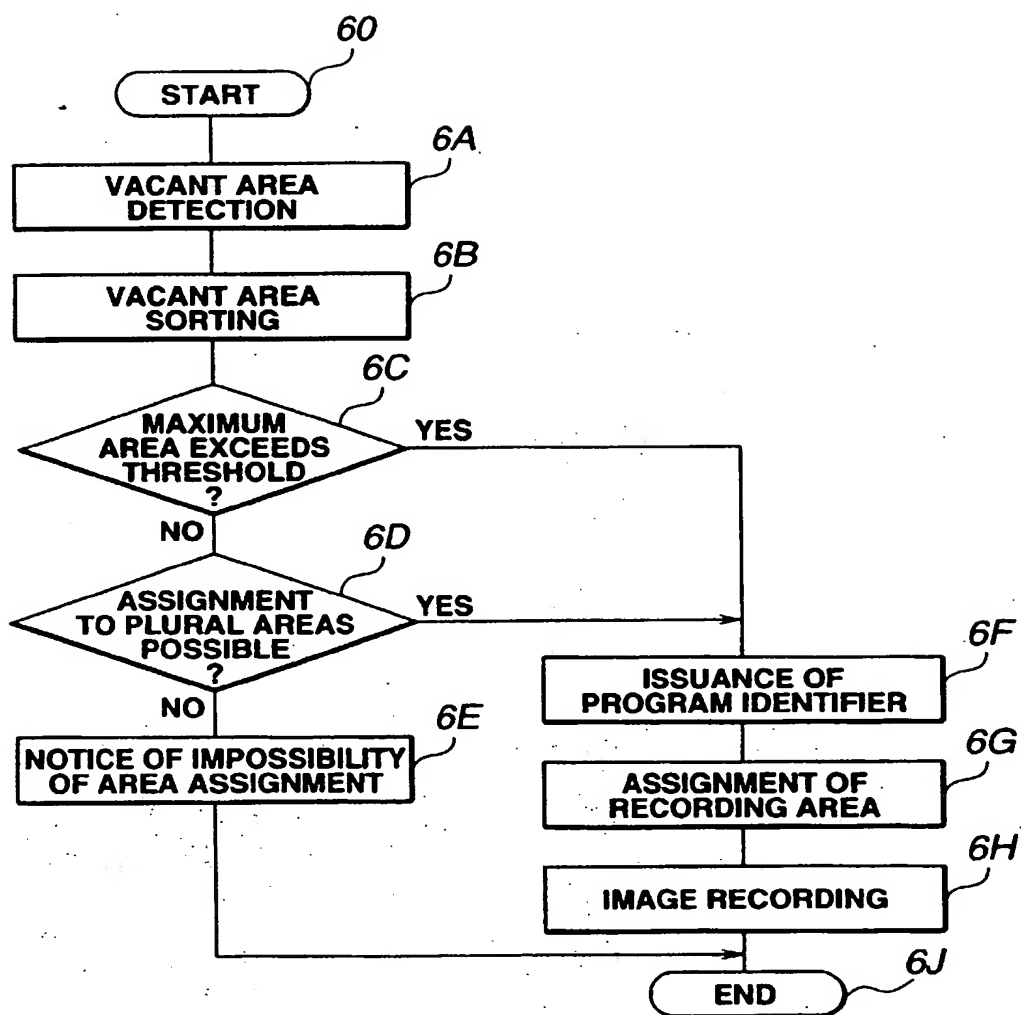


FIG.4

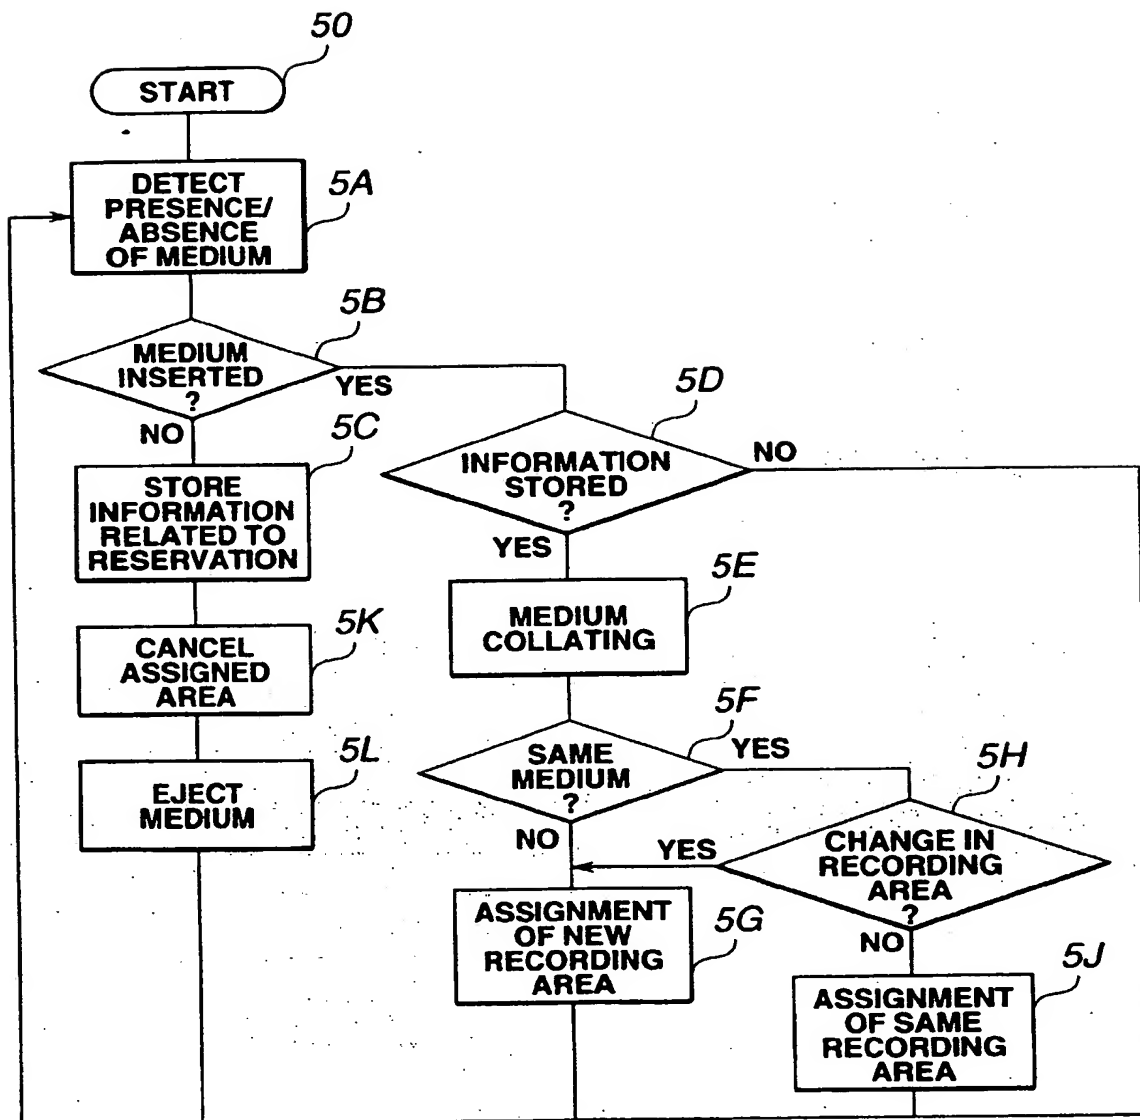


FIG.5

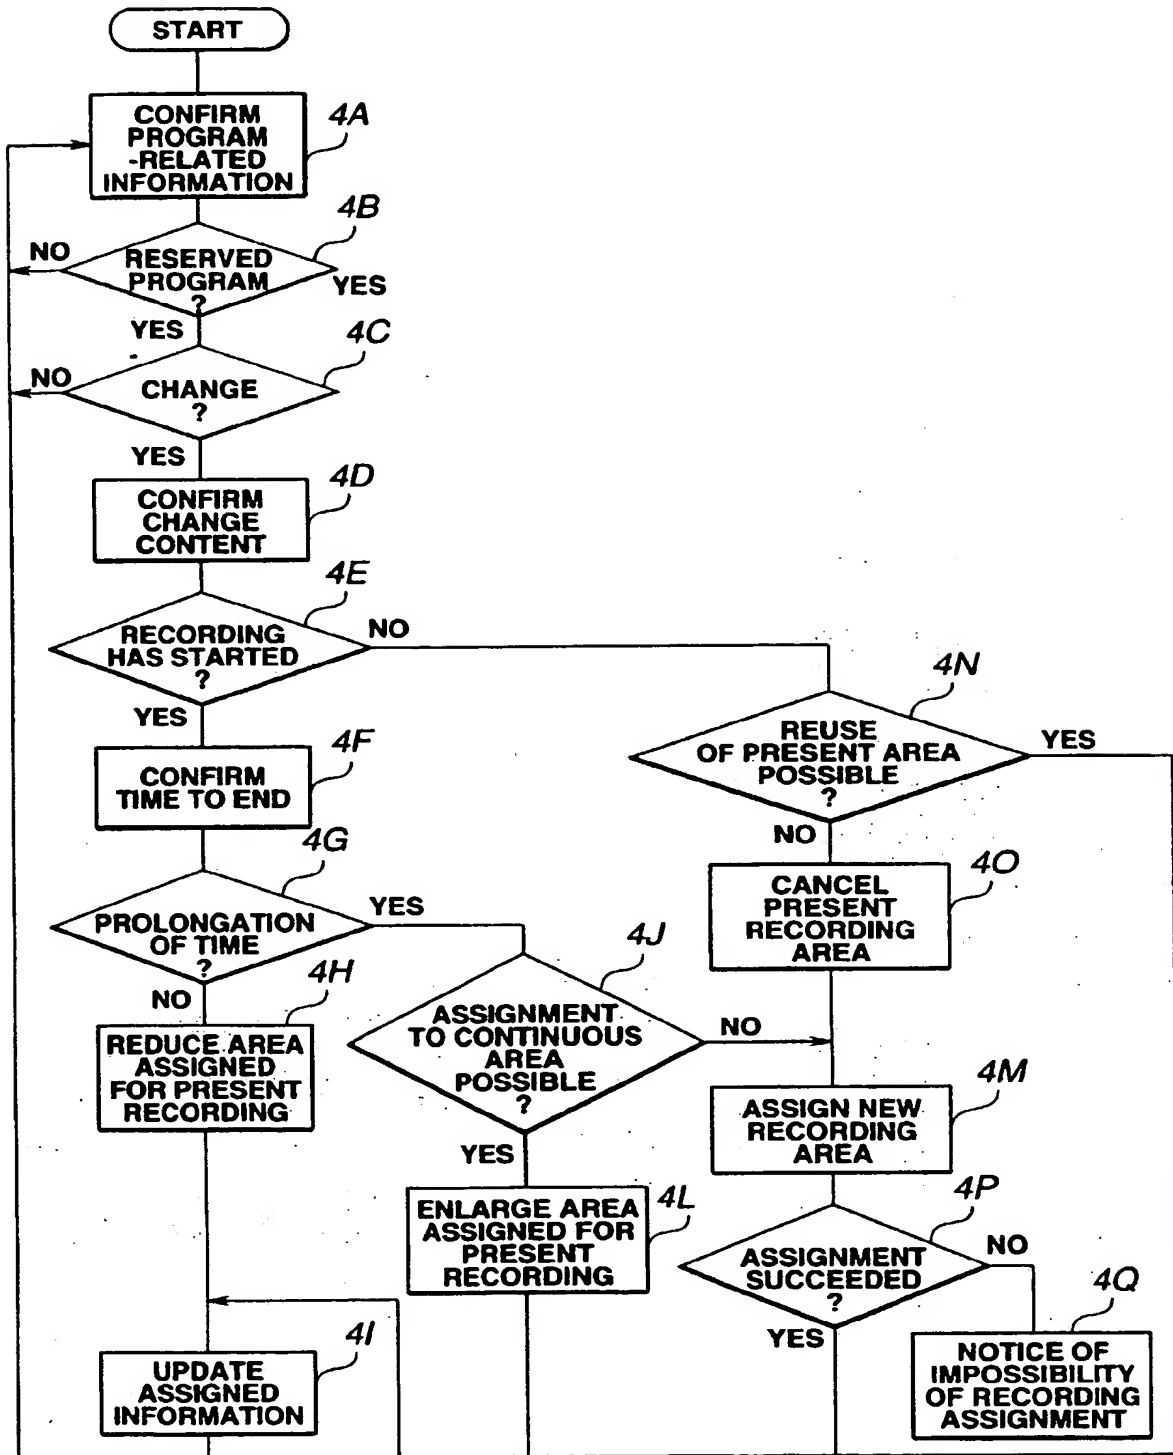


FIG.6

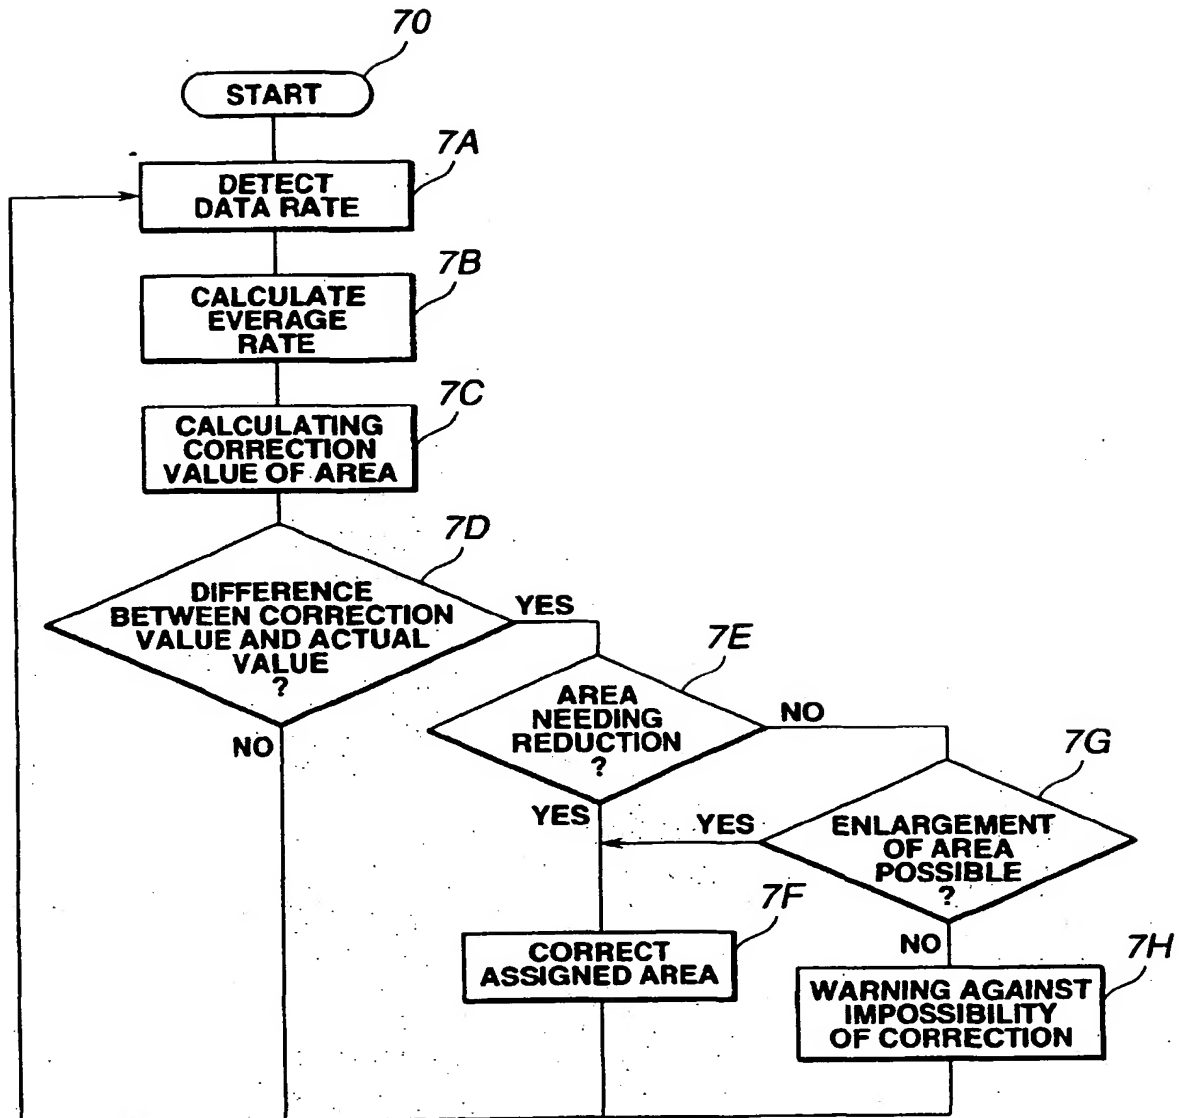


FIG.7



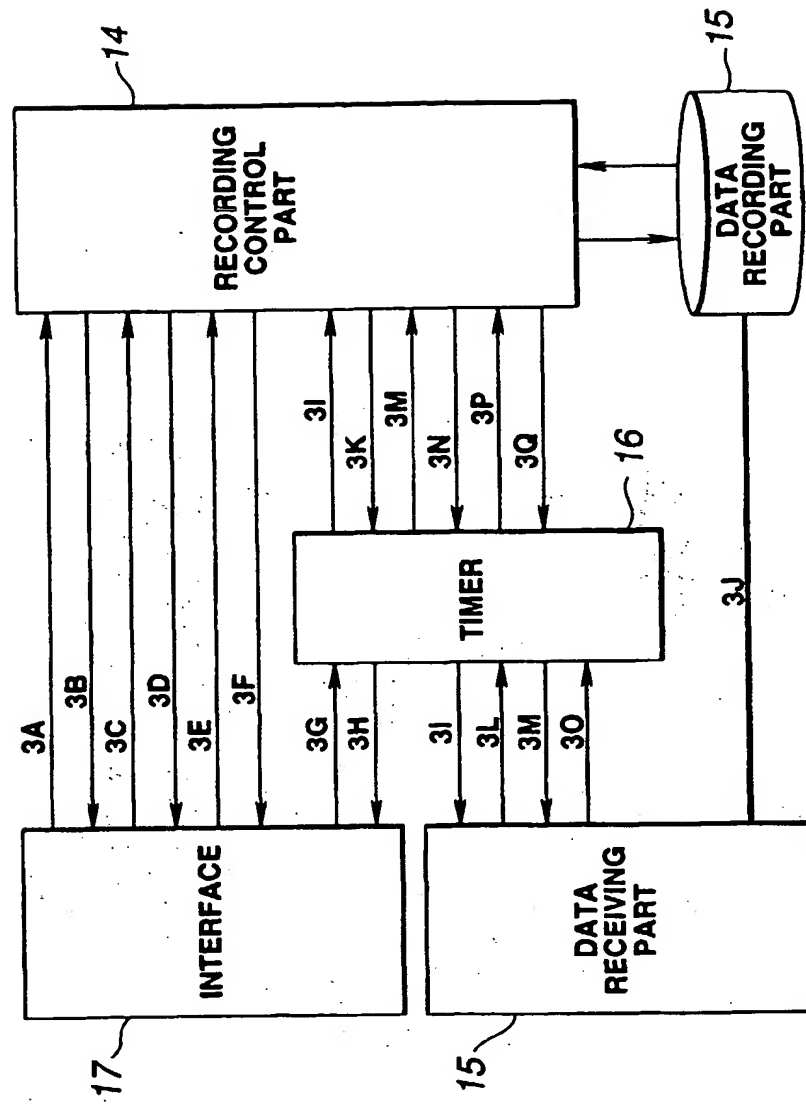


FIG.8



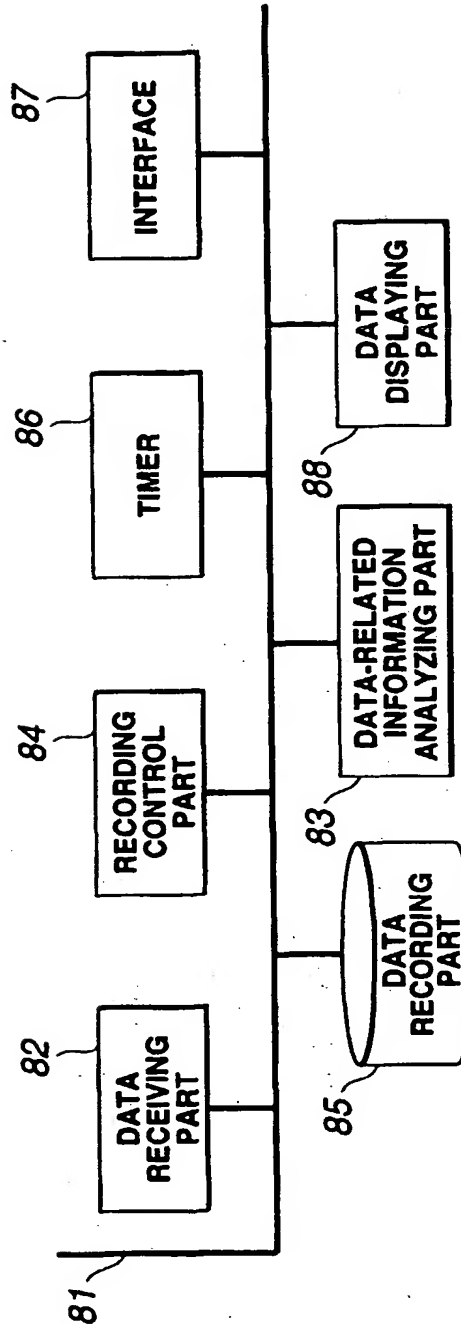

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 973 333 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
29.03.2000 Bulletin 2000/13

(51) Int. Cl.⁷: H04N 7/088, H04N 5/76,
G11B 27/036, G11B 27/32,
G11B 27/11

(43) Date of publication A2:
19.01.2000 Bulletin 2000/03

(21) Application number: 99114104.5

(22) Date of filing: 16.07.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 17.07.1998 JP 20399998

(71) Applicant:
KABUSHIKI KAISHA TOSHIBA
Kawasaki-shi, Kanagawa-ken 210-0913 (JP)


(72) Inventors:
• Natsubori, Shigeyasu
Yokohama-shi, Kanagawa-ken 232-0025 (JP)
• Imai, Toru
Futyu-shi, Tokyo 183-0053 (JP)
• Takahashi, Toshiya
Matsudo-shi, Chiba-ken 270-2241 (JP)
• Oyanagi, Shigeru
Yokohama-shi, Kanagawa-ken 235-0016 (JP)

(74) Representative: HOFFMANN - EITLE
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) Apparatus for recording data, method for recording data and television program receiver

(57) By using program information, the amount of which to be transmitted is not fixed, and related information which is related to the expected amount of the main information, an area for recording main information is ensured in advance on a recording medium. This ensures a reliable recording of a program, the recording of which has already been reserved, without affecting any program which has already been recorded. In addition, even when a change occurs in related information before or after the start of recording information on the recording medium, an area assigned before the start of the recording can be changed corresponding to related information after the change.

FIG.3

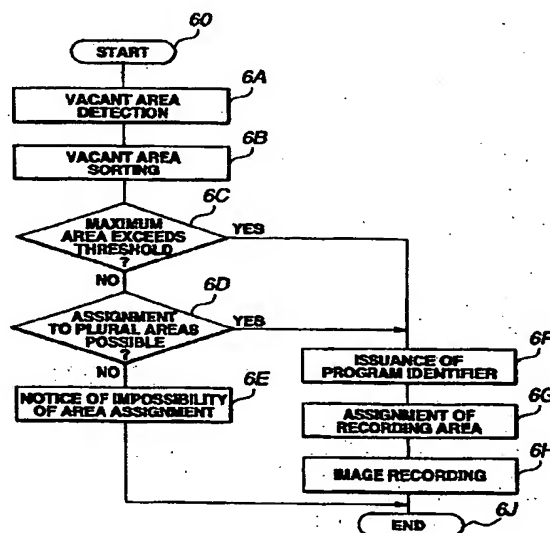

EP 0 973 333 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 11 4184

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 481 702 A (TAKAHASHI KIKUO) 2 January 1996 (1996-01-02) * column 3, line 7 - line 22; figures 2,7 *	1-15	H04N7/088 H04N5/76 G11B27/036 G11B27/32 G11B27/11
A	WO 92 20188 A (IGGULDEN JERRY R ;STRECK DONALD A (US)) 12 November 1992 (1992-11-12) * page 3, line 15 - page 4, line 25; claims 32,33; figure 10 * * page 11, line 1 - page 13, line 11 * -----	1-15	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H04N G11B G06F
-The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 28 October 1999	Examiner BRUNET L.M.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03-82 (P01001)



European Patent
Office

Application Number

EP 99 11 4104

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

1 - 15



European Patent
Office

**LACK OF UNITY OF INVENTION
SHEET B**

Application Number
EP 99 11 4104

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-15

Apparatus (respectively method) for recording data with a vacant area ensuring and re-ensuring device (step)

2. Claim : 16

Television program receiver with a recording device whose recording is modified corresponding to the information of an electronic program guide

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 11 4104

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-10-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5481702 A	02-01-1996	JP 5046447 A	26-02-1993
WO 9220188 A	12-11-1992	NONE	

EPO FORM P0451

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82